PRODUCT INFORMATION PACKET



Model No: 184TTDBD6026 Catalog No: GT0013A

Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V,

1800 & 1500 RPM, 184T Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E






Nameplate Specifications


3	Output HP	5 & 3 Hp
3.7 & 2.2 kW	Voltage	208-230/460 & 190/380 V
1765 & 1475 rpm	Service Factor	1.15 & 1.15
184T	Enclosure	Drip Proof
No Protection	Efficiency	89.5 & 88.5 %
50 °C	Frequency	60 & 50 Hz
14-13.2/6.6 & 10.4/5.2 A	Power Factor	80
Continuous	Insulation Class	F
Α	KVA Code	К
6206	Opp Drive End Bearing Size	6203
Recognized	CSA	Υ
Υ	IP Code	22
1		
	3.7 & 2.2 kW 1765 & 1475 rpm 184T No Protection 50 °C 14-13.2/6.6 & 10.4/5.2 A Continuous A 6206 Recognized	3.7 & 2.2 kW 1765 & 1475 rpm Service Factor 184T Enclosure No Protection Efficiency 50 °C Frequency 14-13.2/6.6 & 10.4/5.2 A Power Factor Continuous Insulation Class A KVA Code 6206 Opp Drive End Bearing Size Recognized CSA

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter Reversible		
Poles	4	Rotation			
Resistance Main	2.72 Ohms	Mounting	Rigid Base		
Motor Orientation	Horizontal	Drive End Bearing	Ball		
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel		
Shaft Type	Т	Overall Length	13.25 in		
Frame Length	8.26 in	Shaft Diameter	1.125 in		
Shaft Extension	2.75 in	Assembly/Box Mounting	F1/F2 CAPABLE		
Inverter Load	CONSTANT 2:1/VARIABLE 10:1				
Outline Drawing	SS621233-200	Connection Drawing	EE7308		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

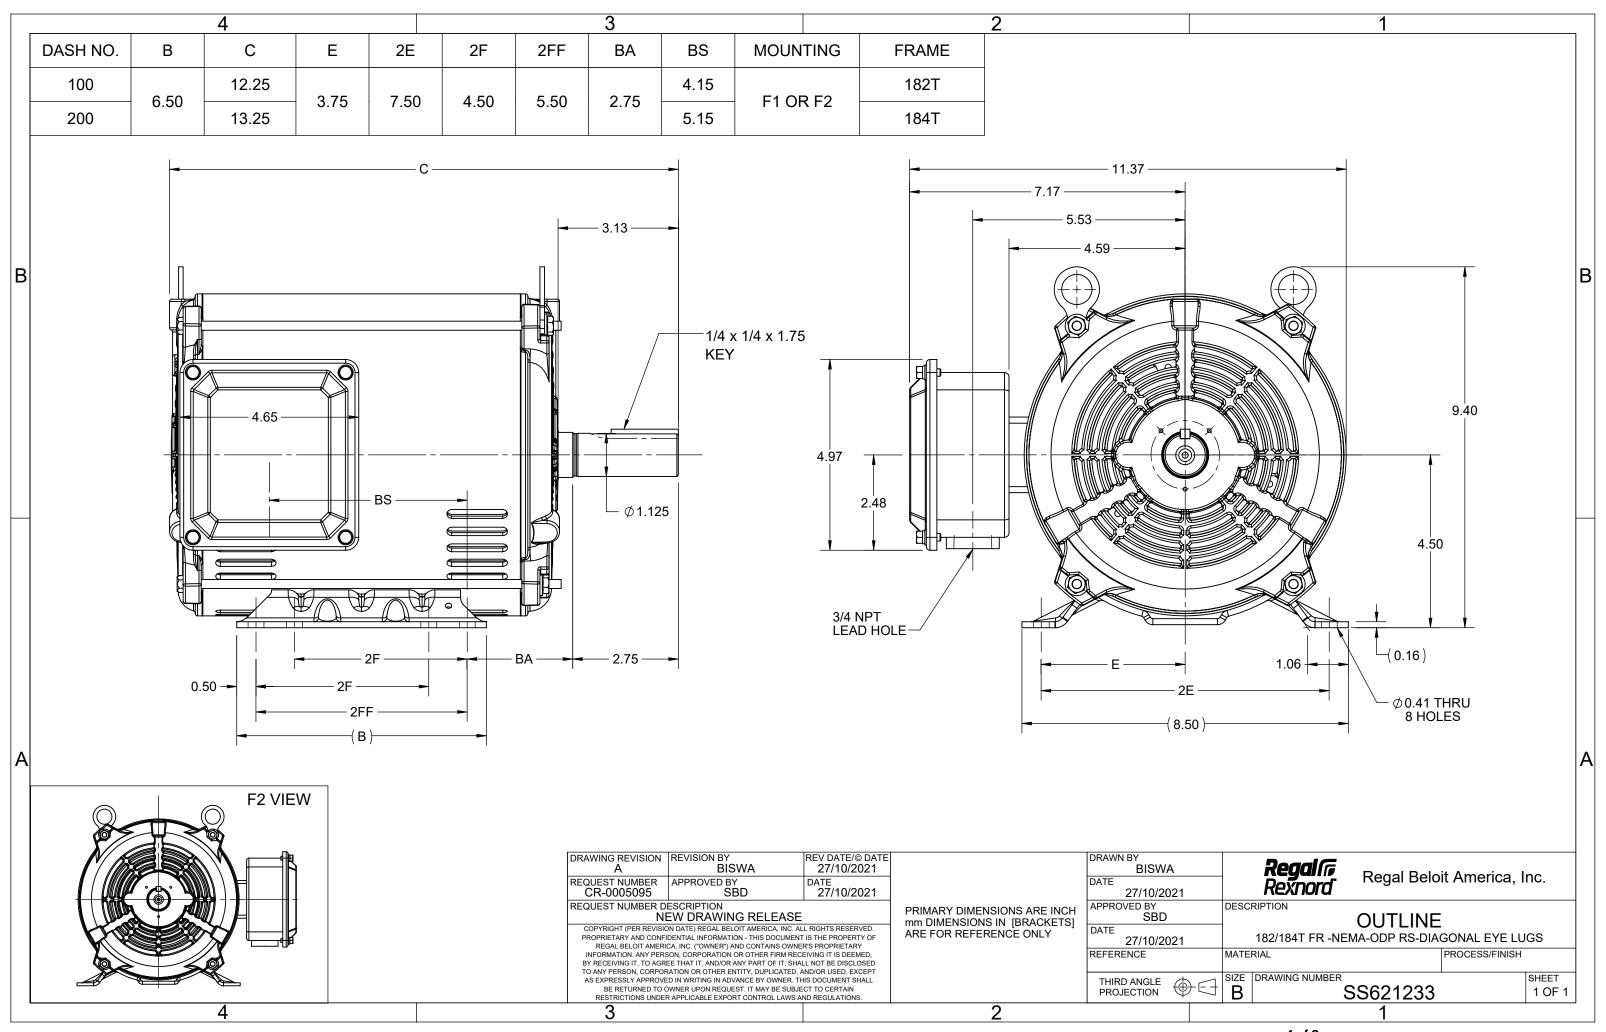


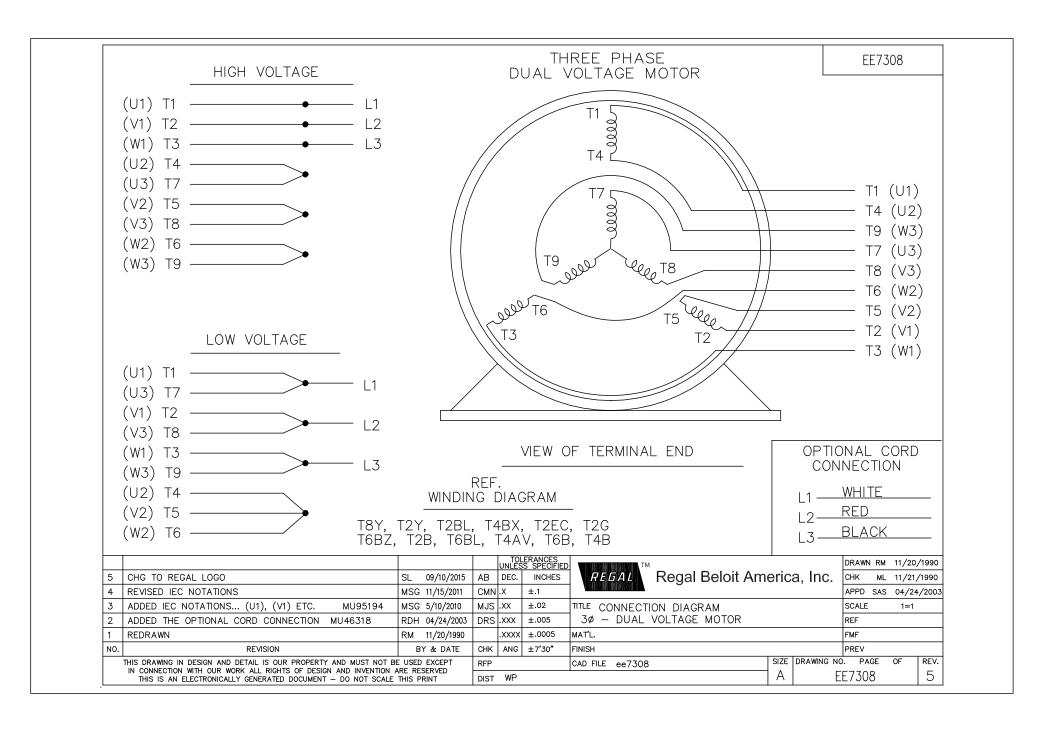




P.O. BOX 8003 WAUSAU, WI 54401-8003 PH. 715-675-3311

										РП. /15-0	1/5-3311		
							Mote	ors			DATA VOLTS:	460	
					CER	TIFICA	TION DAT	A SHE	ET				
CUSTOM	ER:							CUST	OMER P.O. #:				
ORDER#	:						R		CE MODEL #:		06026		-
CONN. DI	AGRAM:	EE7308			•				CAT #:		GT0013A		-
OUTLINE		SS600198	3					CUSTO	MER PART #:				
WINDING			HA31124029	NONE	2				MOUNTING:	F1/F2 CAF	PABLE		-
SPEED:													
				TY	PICAL	MOTOR	PERFOR	MANC	E DATA				
НР	ĸw	SYNC RPM		FLR	FL RPM FRAME		RAME	ENCLOSURE		TYPE	KVA CODE		DESIGN
5	3.7	1800		176	35	5 184T		DP		TDB	К		А
PH	HZ		OLTS	AMI			RT TYPE		DUTY	INSL	S.F.	AMB	ELEV.
3	60/50	208-230/4	460#190/380	14-13.2/6.6	&10.4/5.2	LINE OF	RINVERTER		CONT	F	1.15	50	3300
	F.L. EFF	89.5		3/4 LD EFF	89.5	1/2 LD EFF 88.5 GTD EFF				ELECT. T			
	F.L. PF	80.0		3/4 LD PF	72.0		1/2 LD PF	59.0	88.5		SQ CAGE INV	RATED	
<u> </u>					ı					_		.0 -:	т —
	ORQUE	L	_R AMPS @	460 V		L.R. TORG			B.D. TORQUI		F.L. RISE ((°C)	
14.9	LB-FT		55.0		36.0	LB-FT	242%	46.0	LB-FT	309%	40		
COLIND	PRESSURE	80	DUND	ROTOR) \A/\/2	MAYI	OAD WK2	CAFE	STALL TIME	ет	ADTO/HOLID	AB	ROX.
				0.50	LB-FT ²		MAX. LOAD WK ²		SAFE STALL TIME		STARTS/HOUR		LB.
67	dBA	76	dBA	, 0.50	LD-FI	30	LB-FT ²	20	SEC.		2	84	LD.
					*** \$110	DDI EMEN	NTAL INFOR	MATIO	N ***				
				MOUNT		TOR	SEVERE		ARDOUS	DRIP			
DE BRACKET TYPE		ODE BRA	CKET TYPE	TYPE	-	PRIENTATION DUTY		LOCATION		COVER	SCREENS	PAINT	
STAI	NDARD	STAI	NDARD	RIGID	HORIZ	ZONTAL NO NONE YES		NONE	BLUE (ENAMEL)				
BEA	RINGS	GP	GREASE SHAFT TYPI		TVDE	PE SPECIAL DE		SPECIAL ODE		SHAFT	MATERIAL	EDAME	MATERIAL
DE	ODE		LAGE	517		5, 2	OIAL DL	SPECIAL ODE		SHAFT	WATERIAL	FRANCI	VIATERIAL
BALL	BALL	POLY	REX EM	т			IONE	NONE		1045 HOT ROLLED (C-204)		ROLLED STEEL	
6206	6203	1021	TALK LIVI				TONE	NONE		1040110	THOLLED (O ZO+)	ROLLED STELL	
										SPACE			
THERMOSTATS			CTORS WDG RTD's		BRG RTD's THERMISTORS		CONTROL		HEATERS				
N N	ONE	l N	TON	NON	ΝE	l N	IONE		NONE		FALSE		NA
R1 (ohms/ph)			hms/ph)	X1 (ohms/ph) 3.345			X2 (ohms/ph) Xm (ohms/ph)		VIBRATION (in/sec)		FLOAT		
1.	.588	0	.907	3.34	45	1 3	3.686		76.432		0.150		DDE
*													
N									INVEDTED	TOPOLIE:	CONSTANT 2:1/V	ARIARI F 1	10-1
l ö									NV. HP SPEEI			, II (I) (DEL	
Ιř								NV. HF SFELI	NANGE.	NONE			
Ė									ENCODER:	NONE			
s									NONE	HOHE			
*									NONE			NONE	PPR
									BRAKE:	NONE			
PREF	PARED BY:								NON	ΝE	NONE		
	DATE:	7/20	0/2020						FT-LB:		NA		
									VOLTAGE:		NONE		HZ:
FORM: 3531 REV_4 2/27/06						UL: V - LI,ME-INS,CONST UL REC							

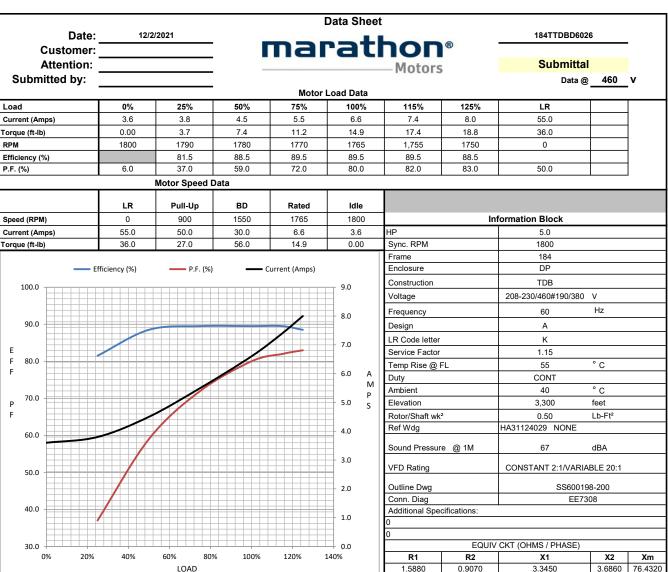

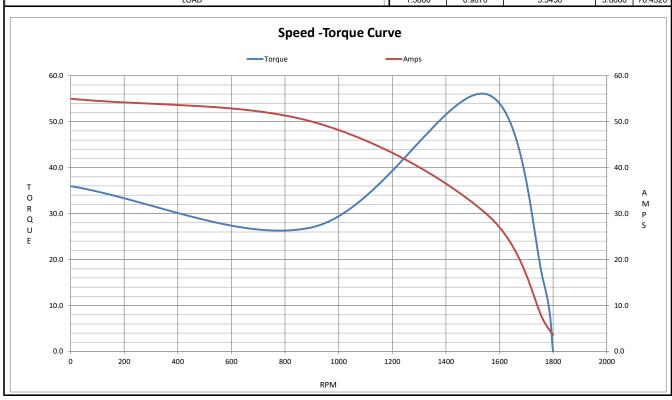



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 184TTDBD6026

(Model No. may contain prefix and/or suffix characters)

Catalog No: GT0013A

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

<u>Authorized Representative in the Community:</u>

J. cerse

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

(€ 22